



DCF EXPRESS

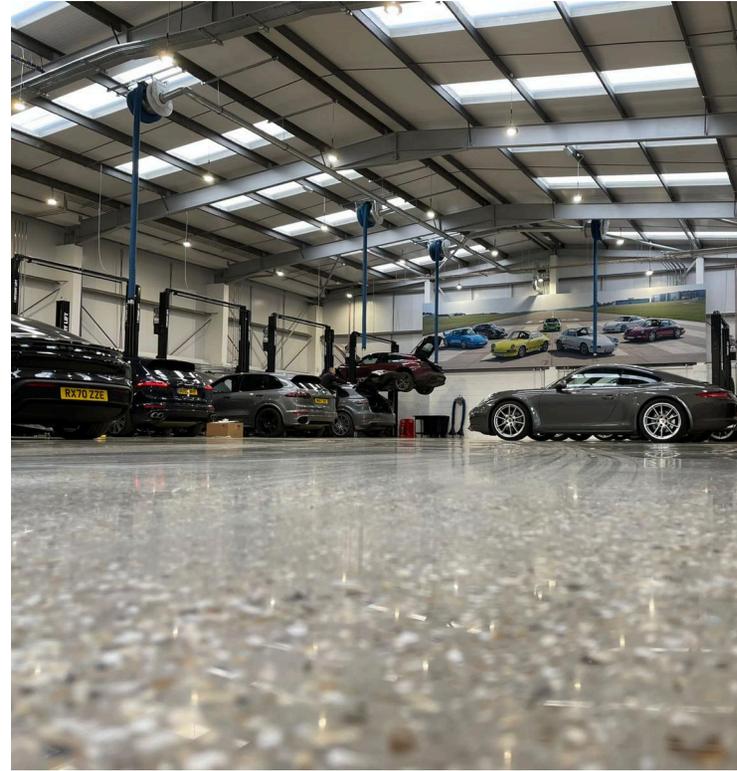

MINI PROJECT BROCHURE

ABOUT US

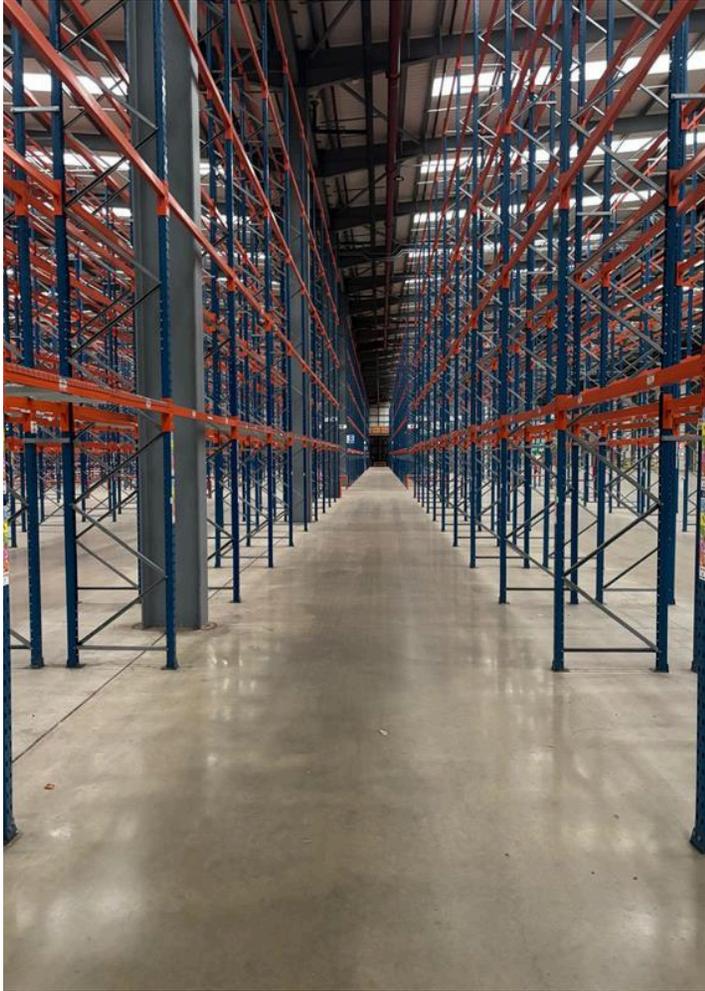

For over twenty years, DC Flooring has redefined industry standards, emerging as the go-to supplier and installer of premium-quality flooring across the U.K. and beyond. Rooted in a customer-centric ethos and fuelled by unparalleled craftsmanship, our journey is characterised by a relentless pursuit of excellence.




Concrete Polishing For a Pristine, Professional Finish

- Up to 80% faster than traditional grinding/polishing systems
- Provides excellent protection against freeze-thaw and salt damage to concrete
- Meets European and US safety requirements (ISO 13105-2; EN 12649)
- Most environmentally-friendly option on the market
- Available in three unique finishes to make your commercial floors - Silk, Gloss and High Gloss
- 10 - 15 year non-dusting warranty
- Invisible floor bolt, crack and concrete repairs
- Increased lifespan of your concrete floor, owing to excellent durability and wear properties



BRISTOL DISTRIBUTION CENTRE

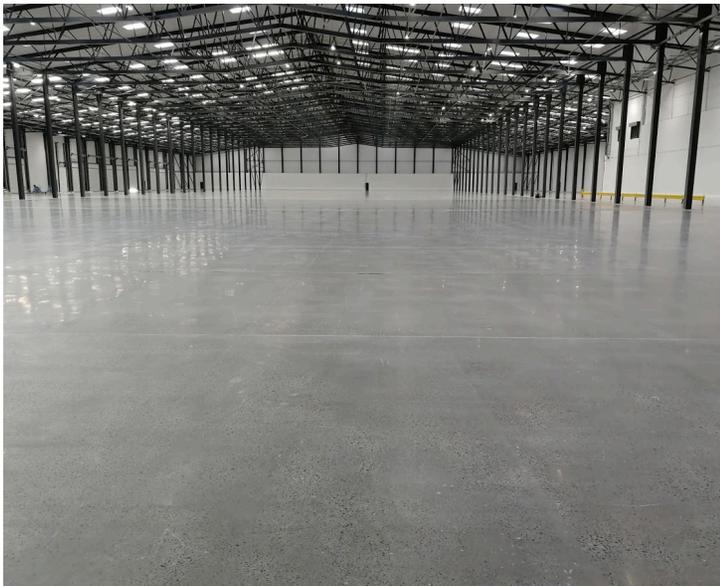

Location: Bristol

Sector: Distribution Centre | Industrial
Warehouse

Client: Pexhurst

Scope: 21,000m²

Timeline: 3 months

Summary: A full 21,000m² refurbishment to restore and modernise this key Bristol distribution hub. The project was completed with a 3,000-grit high-gloss polished concrete finish for a clean, modern industrial look.



PORSCHE

Location: Cathedral Hill Industrial Estate

Sector: Automotive | Industrial Workshop

Client: Porsche

Scope: 480sqm | grind slab and polishing system

Timeline: 2 weeks

Summary: This project required removing old epoxy coatings, extracting 200+ bolts and re-flattening the uneven slabs through targeted diamond grinding. Once restored, the floor was finished with a 400-grit mid-gloss polish, delivering a clean, durable and modern industrial surface.





WAREHOUSE IN BASILDON



Location: Basildon

Sector: Industrial Workshop

Client: Peter

Scope: 350sqm

Timeline: 2 weeks

Summary: Ground it down to remove epoxy coatings, bolt removal & infill. We dry polished to 3000 grit (high gloss finish) - complete 7 stage polish





MAKRO SITE



Location: Croydon


Sector: Wholesale Warehouse | Retail Distribution

Client: Makro

Scope: 10 000sqm - remove redundant fixings, infill and diamond ground & multiple slab repairs in various areas

Timeline: 10 weeks

Summary: This project included bolt removal, epoxy-mortar repairs and a full diamond-grinding process to restore the worn wholesale warehouse surface. The slab was refinished using the DCF Express system, achieving a smooth, durable 400-grit mid-gloss polish suited to high-traffic retail operations & machinery.

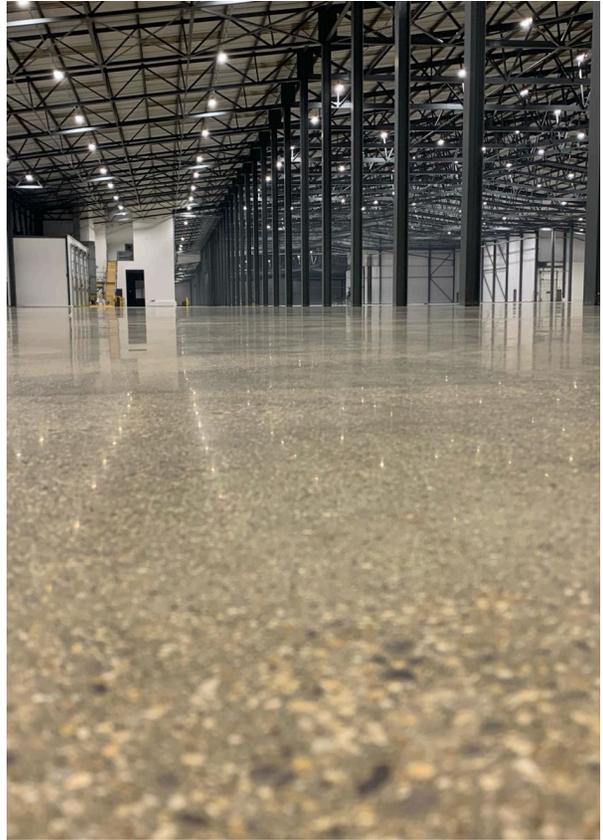

PROJECT ALASKA



Location: Dartford


Sector: Industrial | Warehouse Facility

Client: Curo Construction

Scope: 10 000sqm | 400 pile holes were excavated & infilled with an industrial strength mortar

Timeline: 8 weeks

Summary: This refurbishment involved removing the existing floor, carrying out full diamond grinding, and completing essential repairs including bolt removal, drilling and polymer-cement refills. Additional works included line-marking removal and targeted concrete patch repairs. The project was finished with the 400-grit mid-gloss DCF Express Polishing System, delivering a durable and refreshed industrial surface

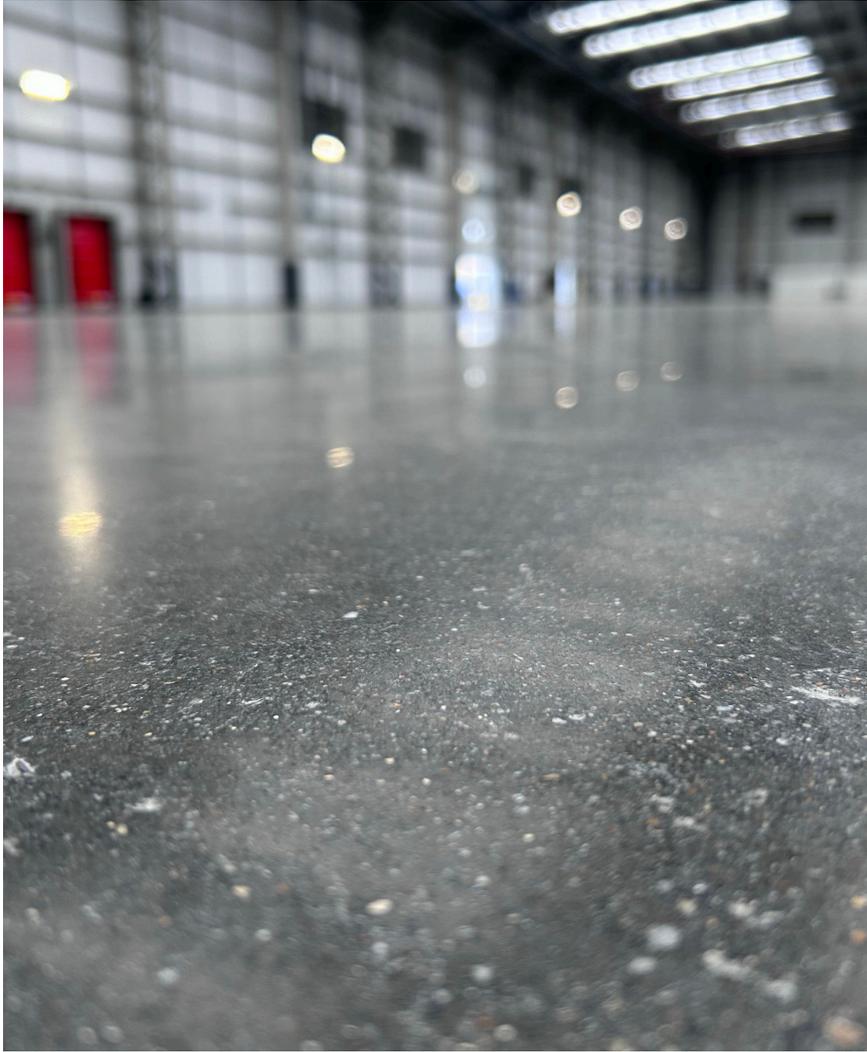

SHERWOOD INDUSTRIAL SITE

Location: Sherwood Industrial Estate, Nottingham

Sector: Industrial | Manufacturing Facility

Client: Inco.

Scope: 10 000sqm

Timeline: 14 weeks

Summary: Works included core drilling, full application of the DCF Polishing System, and refining the surface to a 400-grit mid-gloss finish. The project was completed using the DCF Densifier and Stain Protector, providing a clean, durable and long-lasting industrial surface.



EUROLINK

Location: St Helens, Liverpool


Sector: Industrial | Production Facility

Client: Inco


Scope: 9980sqm | PU screed removal, core drill, road planning and remediation

Timeline: 18 weeks

Summary: This project involved uplifting 4,000m² of PU screed followed by full diamond grinding to reopen and refine the surface. The floor was polished to a 400-grit mid-gloss finish and completed with a high-speed burnisher for a clean, consistent and durable industrial result.

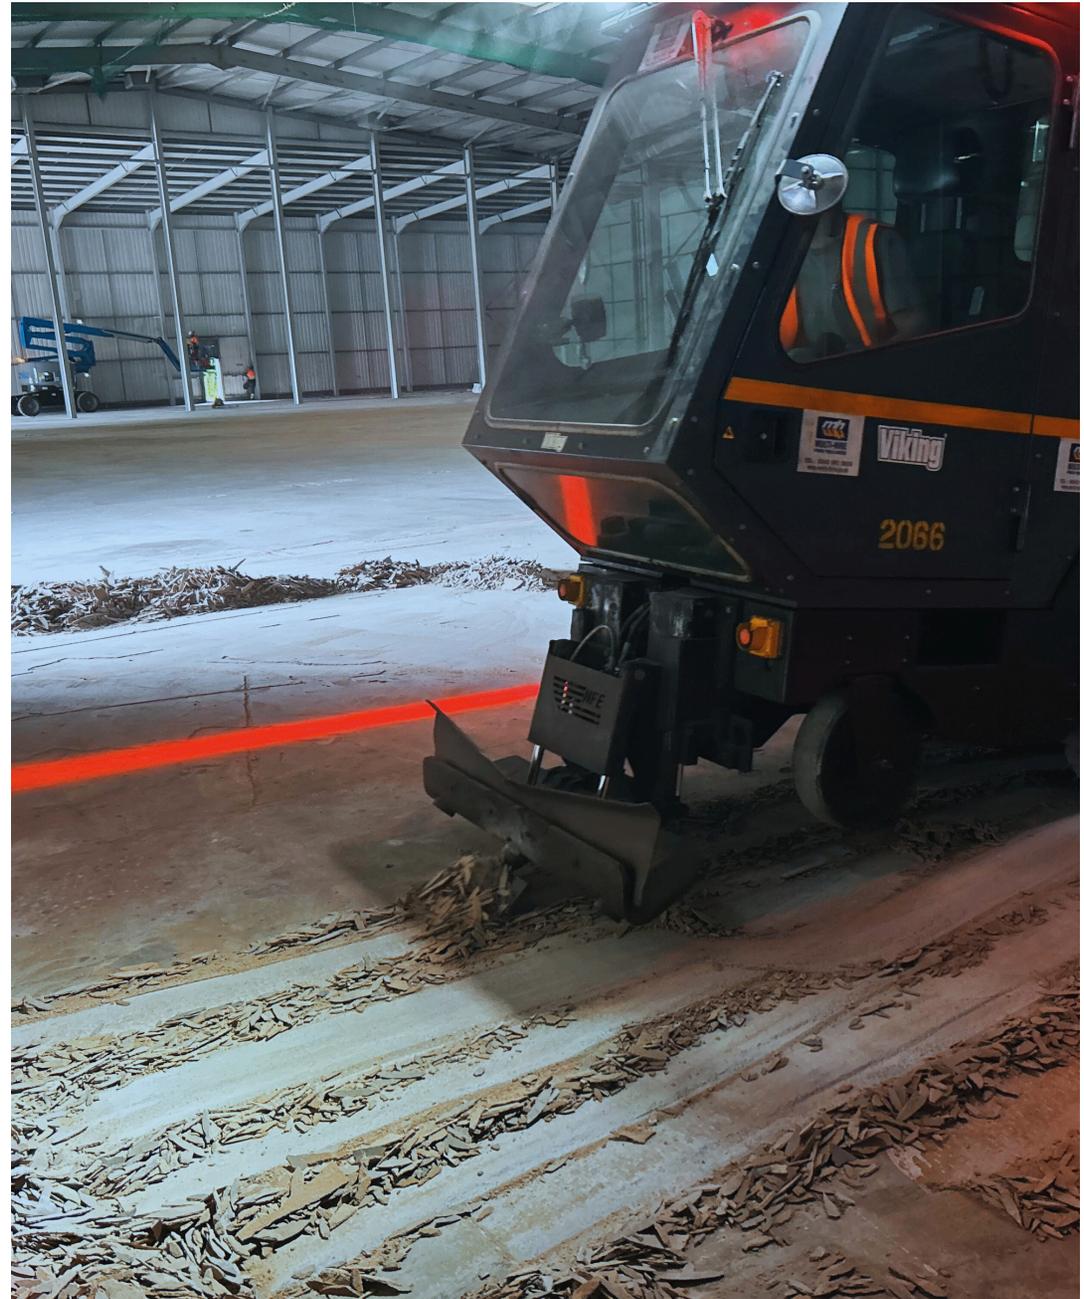

M & S ROBOTICS WAREHOUSE

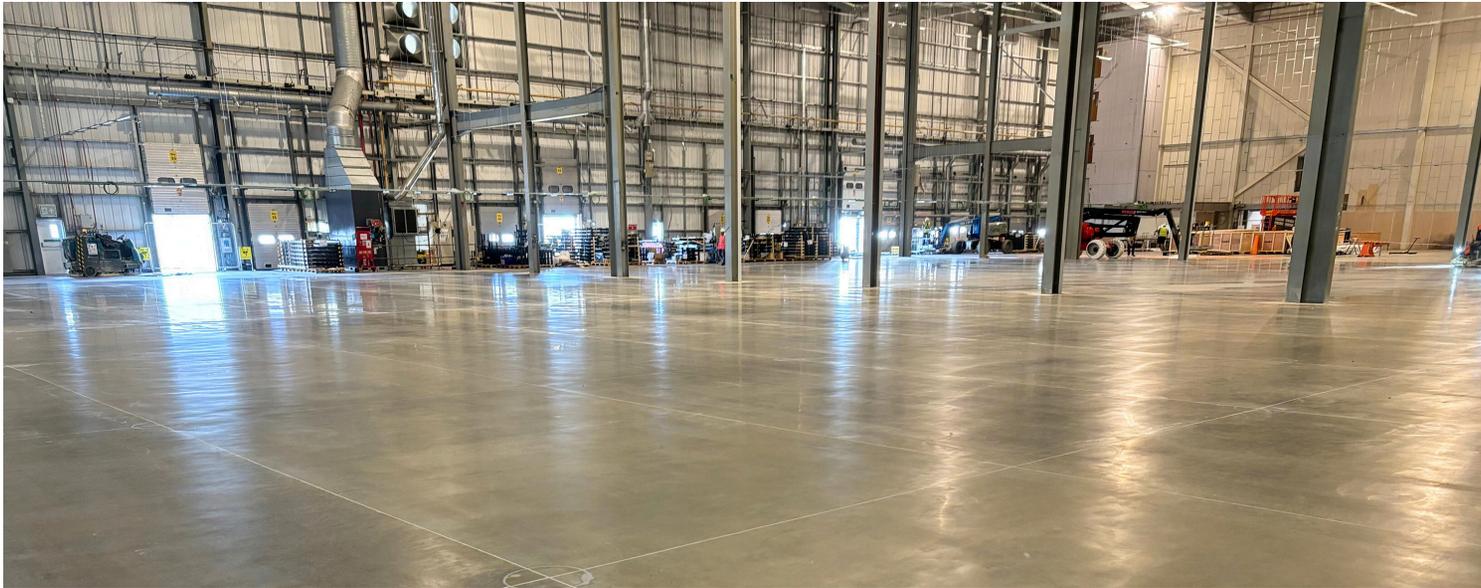

Location: Swindon


Sector: Robotics Warehouse | Automated Logistics

Client: Marks & Spencer

Scope: 6,000+ m²

Timeline: 2 weeks

Summary: This 6,000+ m² refurbishment required delivering a controlled, abrasion-resistant finish suited to autonomous robotic movement. The floor was polished to a satin, 200-grit level using densifier and stain protector to meet the required reflectiveness (MOHs 8) while keeping ESD values within strict limits. The result is a stable, consistent surface optimised for seamless robotic operation.

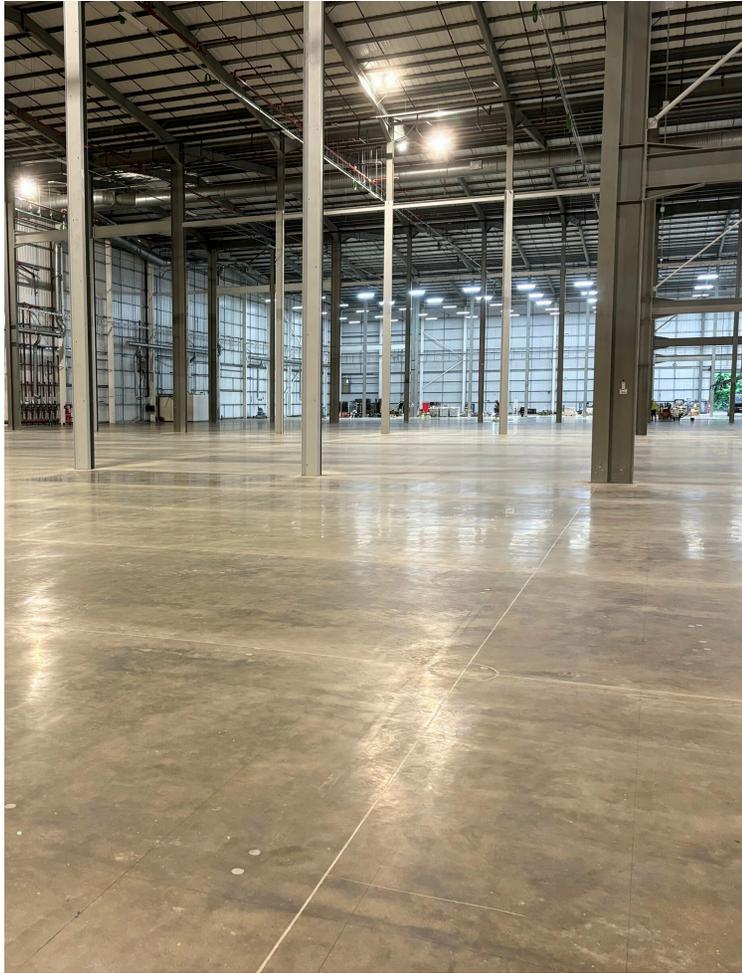

IPSWICH TRAIN STATION



Location: Ipswich

Sector: Transport | Public Infrastructure

Client: Co-op

Scope: 200sqm



Timeline: 8 days

Summary: This project included removing the existing slab, installing a reinforced 150 mm bonded screed with structural dowels, and applying the Conceria Optimal Overlay enhanced with DCF Trowelhard. The surface was cured, fully prepared, and polished to 3000 grit, then sealed and burnished for a durable, high-gloss finish suited to heavy public use.





PURCHAS ROAD

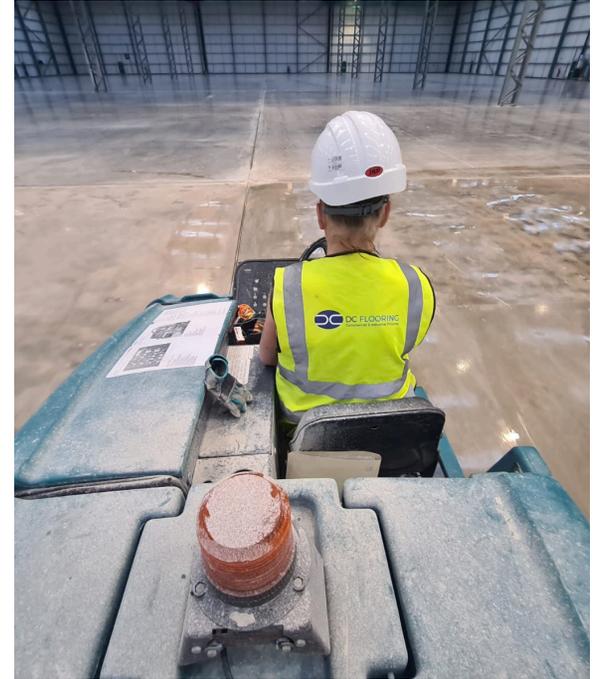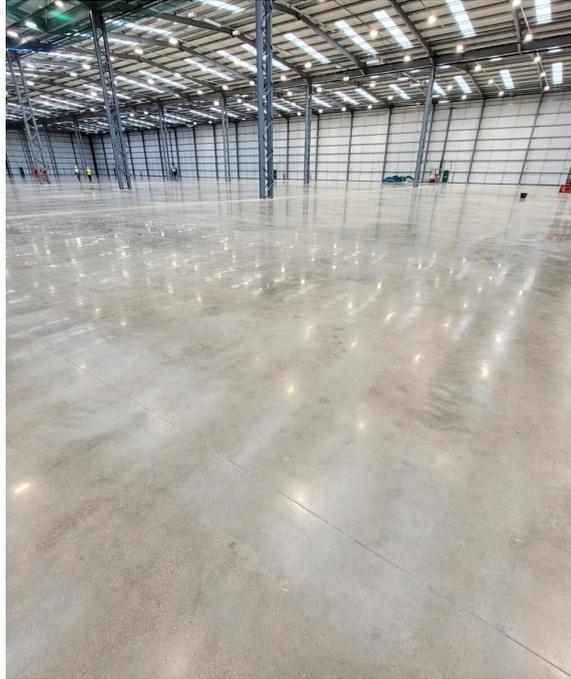

Location: Didcot

Sector: Distribution Warehouse

Client: Pexhurst

Scope: 15 000sqm - DCF Express

Timeline: 12 weeks

Summary: While the original scope allowed for 10,000 anchor bolt removals, site conditions revealed an additional 7,000 bolts, which were successfully removed as part of the works. We also did line marking removal, re-masticing of expansion joints, local infill repairs, and finishing using the DCF Express system to a mid-gloss 400-grit finish.





Let us bring your vision to life.



www.deflooring.co.uk | info@deflooring.co.uk